




CATERLUX
Live an illuminated life



5mm Magnetic Lighting System

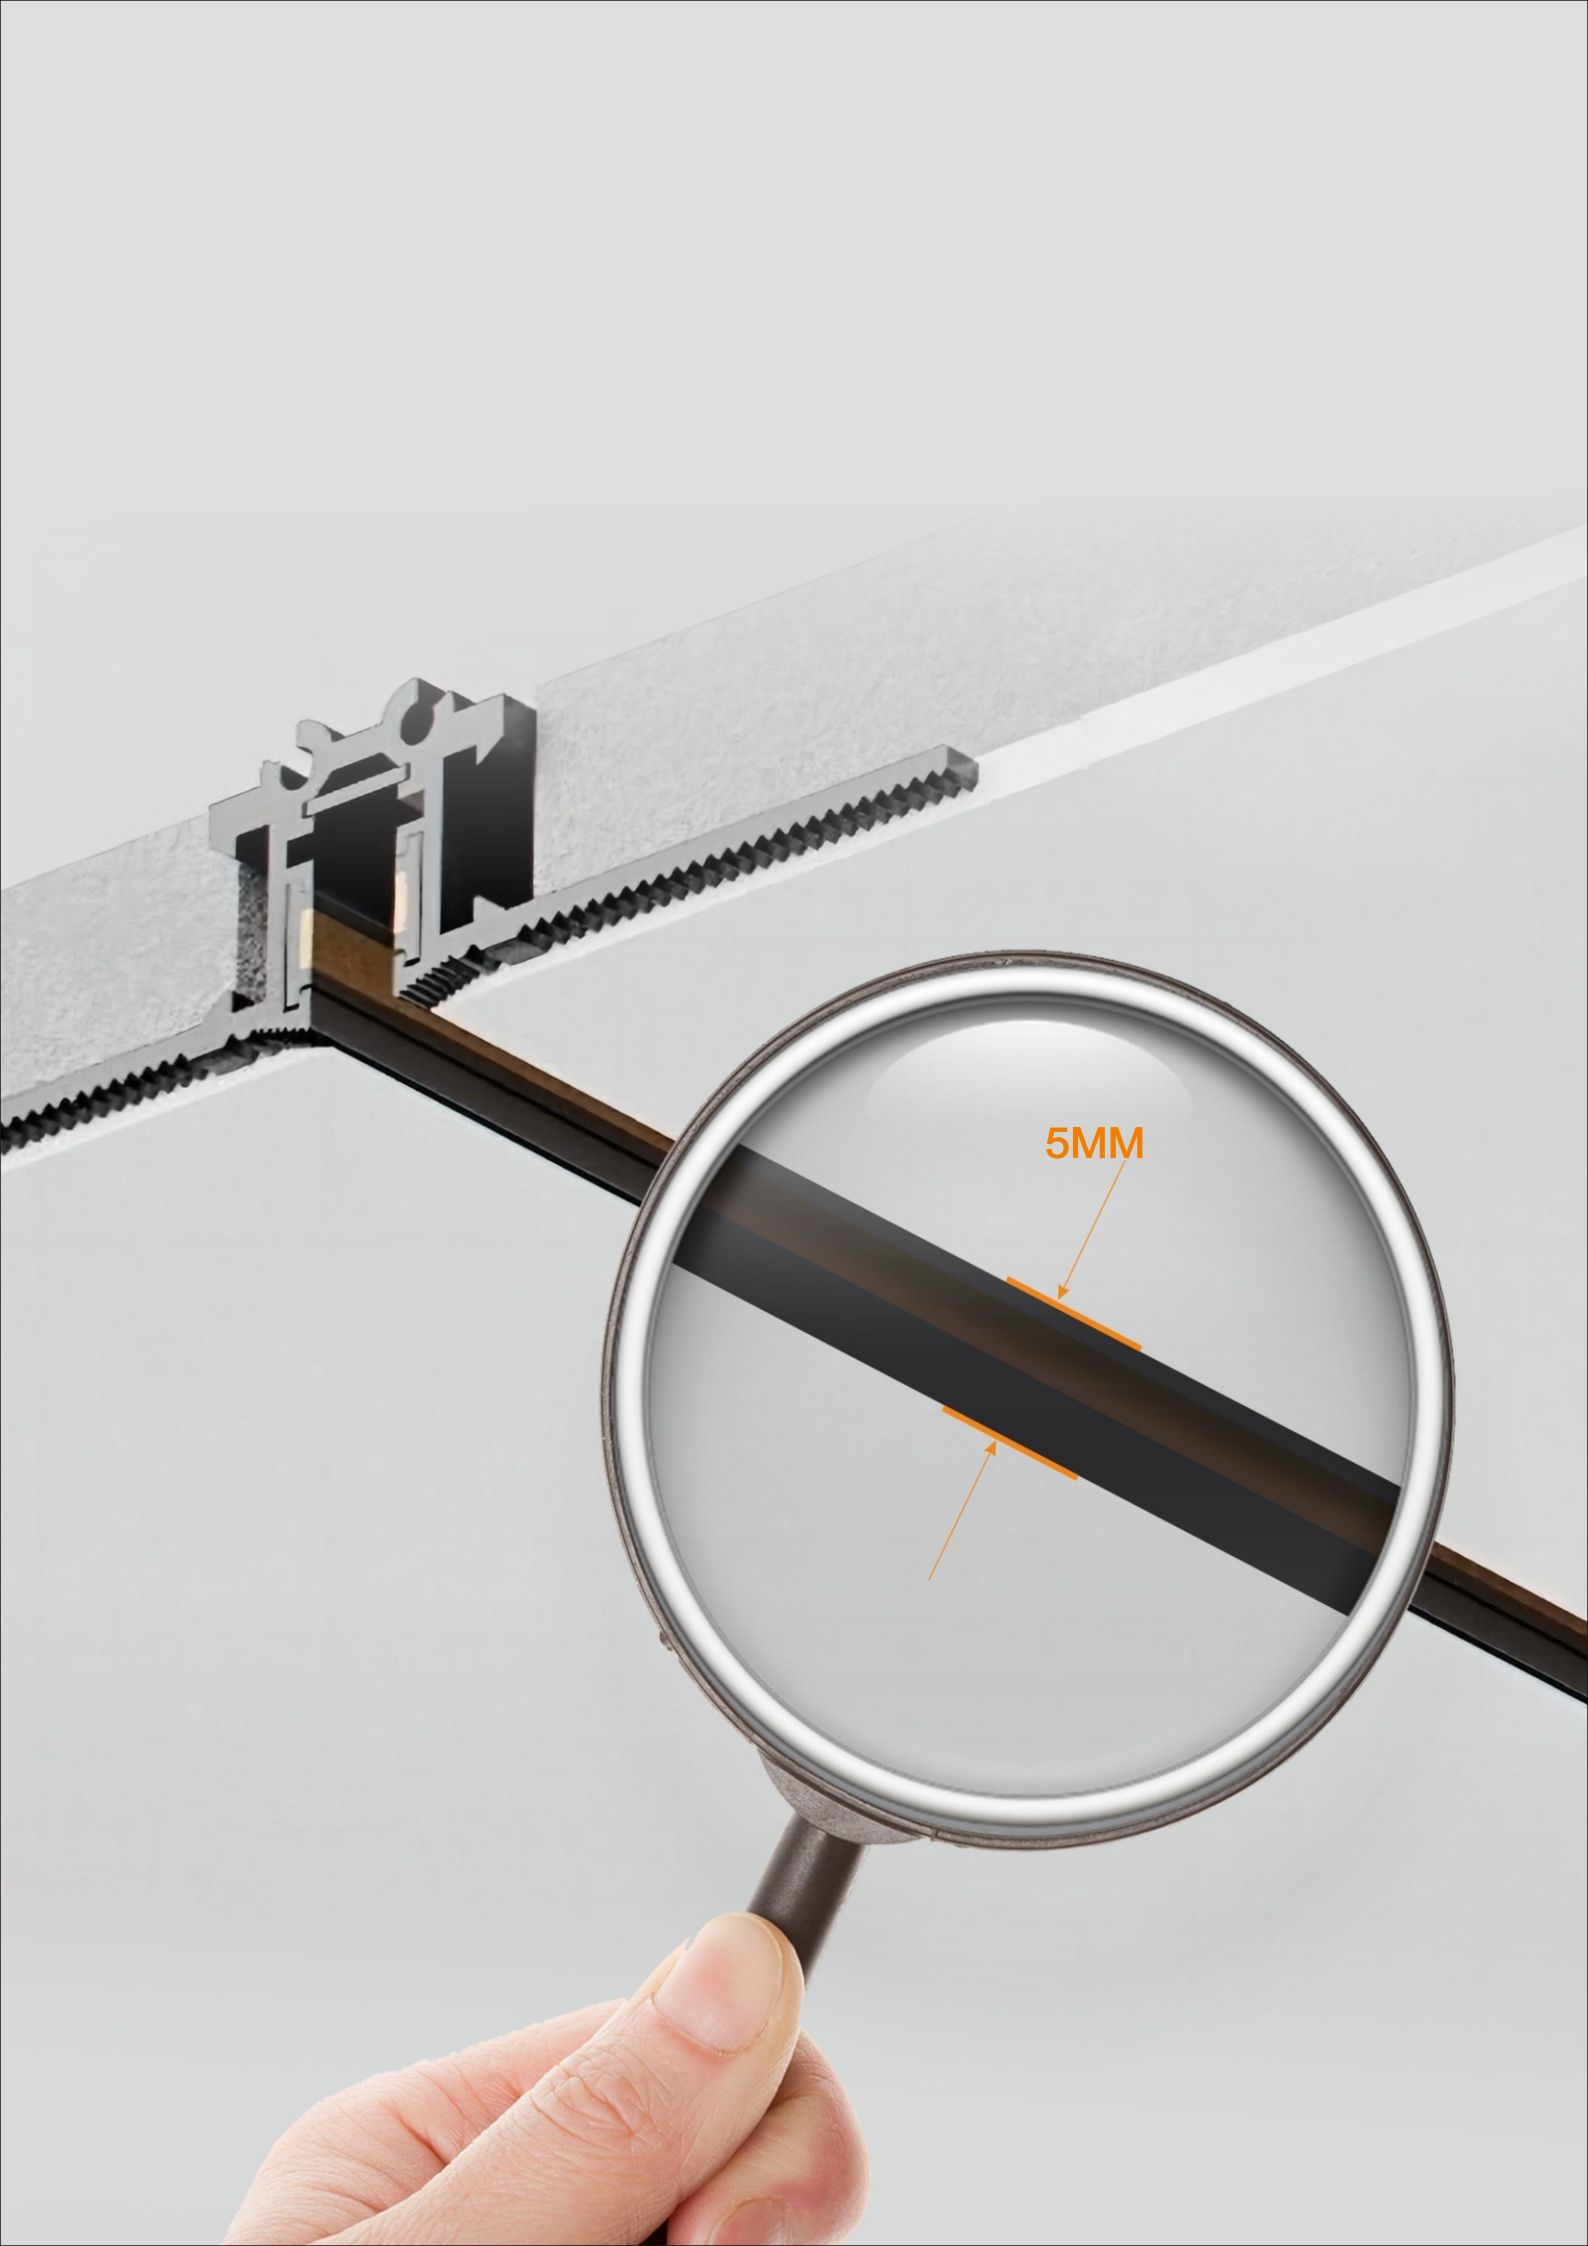

5MM

ABOUT US

Ever since Caterlux's inception in 2016, we have been striving to light up your homes with our avant-garde products and exceptional client service. We specialise in energy efficient LED lighting solutions adding value to homes and office spaces.



As we have embarked on a journey towards illuminating the future with our premium lighting solutions, our innovative designs with minimal pricing are all set to create history in the lighting industry.

From initial consultation to designing to conceptualization to delivering luxurious and even custom made lighting products with high quality standards is what Caterlux firmly believes in.


We ensure our clients not only with hand picked high end products but also the perfect balance between quality, reliability endorsing panache and stature.




CTR-WRT Track (Recessed)



CTR-WRT-L01




CTR-WRT-J01




CTR-WRT-J02


Code	Input Voltage	Current	Length(mm)
CTR-WRT-0.5M	DC 24V	4A max	500
CTR-WRT-1M	DC 24V	4A max	1000
CTR-WRT-2M	DC 24V	4A max	2000
CTR-WRT-3M	DC 24V	4A max	3000




CTR-WRT-E01



CTR-WRT-E02






CTR-WRT-END




CTR-WRT-C01

CTR-WDT Track (Recessed)



CTR-WDT-L01





CTR-WDT-J01


Code	Input Voltage	Current	Length(mm)
CTR-WDT-0.5M	DC 24V	4A max	500
CTR-WDT-1M	DC 24V	4A max	1000
CTR-WDT-2M	DC 24V	4A max	2000
CTR-WDT-3M	DC 24V	4A max	3000

“illuminate your space with Caterlux”


CTR-WST Track (Surface)



CTR-WST-L02




CTR-WST-J02




CTR-WST-C01


Code	Input Voltage	Current	Length(mm)
CTR-WST-0.5M	DC 24V	4A max	500
CTR-WST-1M	DC 24V	4A max	1000
CTR-WST-2M	DC 24V	4A max	2000
CTR-WST-3M	DC 24V	4A max	3000

CTR-WST Track (Surface)





Code	Input Voltage	Current	Rounded corners
CTR-WST-R600Q	DC 24V	4A max	Ø500
CTR-WST-R900Q	DC 24V	4A max	Ø1000
CTR-WST-R1200Q	DC 24V	4A max	Ø2000

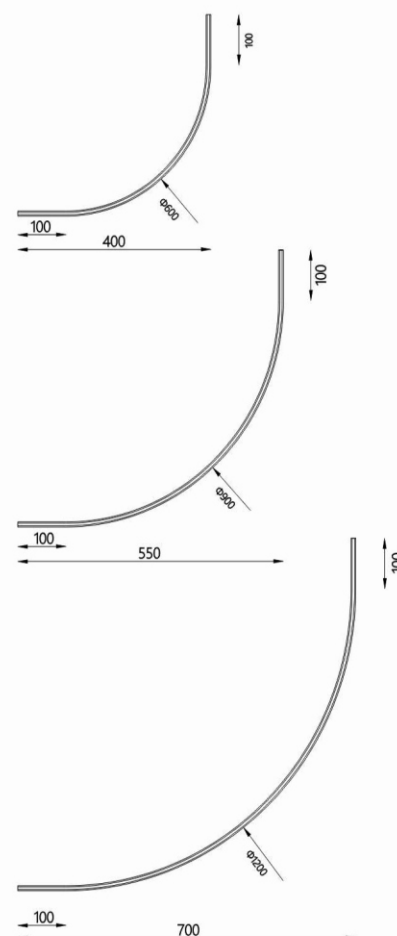

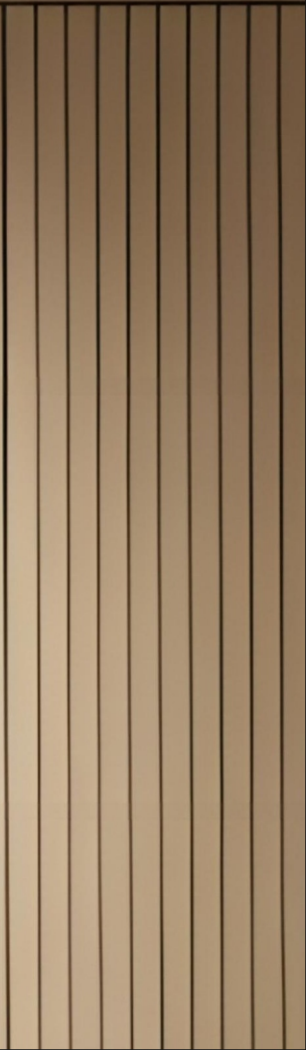

CTR-WSAO525DR




Power :
3W
Luminous flux :
180 lm
CRI :
Ra>90
CCT :
3000K/4000K/6000K

Material :
Aluminium
Beam Angle :
15°/24°/36°
Input voltage :
DC24V
Description :
Track spotlight

Colour :
BK WH GY

CTR-WSAO535DR




Power :
5W
Luminous flux :
500 lm
CRI :
Ra>90
CCT :
3000K/4000K/6000K

Material :
Aluminium
Beam Angle :
15°/24°/36°
Input voltage :
DC24V
Description :
Track spotlight

Colour :
BK WH GY

CTR-WSAO545DR



Power :
9W
Luminous flux :
700 lm
CRI :
Ra>90
CCT :
3000K/4000K/6000K

Material :
Aluminium
Beam Angle :
15°/24°/36°
Input voltage :
DC24V
Description :
Track spotlight

Colour :
BK WH GY

“Your Brighter World”

Transform your space with Lighting. Our energy-efficient LEDs and stylish fixtures help you create the perfect ambience, brightening your life with innovation.




E x t r e m e l y

s l i m

d e s i g n

**5mm
Magnetic Lighting System**

CTR-WWAO560NR-A




Power :
5W
Luminous flux :
450 lm
CRI :
Ra>90
CCT :
3000K/4000K/6000K

Material :
Aluminium
Beam Angle
15°/24°/36°
Input voltage :
DC24V
Description :
Spot Downlight

Colour :
BK AU WH
GY

CTR-WWAO560NR-B





Power :
5W
Luminous flux :
450 lm
CRI :
Ra>90
CCT :
3000K/4000K/6000K

Material :
Aluminium
Beam Angle
15°/24°/36°
Input voltage :
DC24V
Description :
Spot Downlight

Colour :
BK AU WH
GY

CTR-WWAO560NR-C





Power :
5W
Luminous flux :
450 lm
CRI :
Ra>90
CCT :
3000K/4000K/6000K

Material :
Aluminium
Beam Angle
15°/24°/36°
Input voltage :
DC24V
Description :
Spot Downlight

Colour :
BK AU WH
GY

CTR-WWAO560NR-D




Power :
5W
Luminous flux :
450 lm
CRI :
Ra>90
CCT :
3000K/4000K/6000K

Material :
Aluminium
Beam Angle
15°/24°/36°
Input voltage :
DC24V
Description :
Spot Downlight

Colour :
BK AU WH
GY



CTR-WWBO513NR




Power : 8W
 Luminous flux : 700 lm
 CRI : Ra>80
 CCT : 3000K//4000K/6000K

Material : Aluminum
 Beam Angle : 100°
 Input voltage : DC24V
 Description : Spot Panel Light

Colour :
 ● BK ○ WH ● GY

CTR-WWBO514NR



Power : 12W
 Luminous flux : 1100 lm
 CRI : Ra>80
 CCT : 3000K//4000K/6000K


Material : Aluminium
 Beam Angle : 100°
 Input voltage : DC24V
 Description : Spot Panel Light

Colour :
 ● BK ○ WH ● GY



“Shining Bright in Every Space”

Discover the magic of lighting . From eco-friendly LED to contemporary fixtures, our lighting solutions will transform your surroundings and bring a touch of brilliance to every corner of your life.










E x t r e m e l y

s l i m








d e s i g n

**5mm
Magnetic Lighting System**








CTR-WLBO530NS

		   	Power : 5W	Material : Aluminium+PC	Colour :  BK
			Luminous flux : 450 lm	Beam Angle : 100°	
			CRI : Ra>80	Input voltage : DC24V	
			CCT : 3000K/4000K/6000K	Description : Slim Linear Panel Light	

CTR-WLBO560NS

		   	Power : 10W	Material : Aluminium+PC	Colour :  BK
			Luminous flux : 900 lm	Beam Angle : 100°	
			CRI : Ra>80	Input voltage : DC24V	
			CCT : 3000K/4000K/6000K	Description : Slim Linear Panel Light	

CTR-WLBO590NS

		   	Power : 15W	Material : Aluminium+PC	Colour :  BK
			Luminous flux : 1300 lm	Beam Angle : 100°	
			CRI : Ra>80	Input voltage : DC24V	
			CCT : 3000K/4000K/6000K	Description : Slim Linear Panel Light	

“A Smart Lighting Solution”


We offer a revolutionary smart lighting solution for the modern world. Enhance your ambience with precision control, energy efficiency, and convenience like never before.

Extremely
slim design



**5mm
Magnetic Lighting System**

CTR-WPAO540NR



Power :
7W

Luminous flux :
500 lm

CRI :
Ra>90

CCT :
3000K/4000K/6000K

Material :
Aluminium

Beam Angle :
15°/24°/36°

Input voltage :
DC24V


Description :
Hanging Tube

Colour :

● BK ● AU

○ WH ○ GY

CTR-WPAO518NR-A



Power :
3W

Luminous flux :
180 lm

CRI :
Ra>90

CCT :
3000K/4000K/6000K

Material :
Aluminium

Beam Angle :
15°/24°/36°

Input voltage :
DC24V


Description :
Slim Hanging Tube

Colour :

● BK ● AU

○ WH ○ GY

CTR-WPAO518NR-B



Power :
3W

Luminous flux :
180 lm

CRI :
Ra>90

CCT :
3000K/4000K/6000K

Material :
Aluminium

Beam Angle :
15°/24°/36°

Input voltage :
DC24V


Description :
Hanging Shell

Colour :

● BK ● AU

○ WH ○ GY

CTR-WPAO518NR-C



Power :
3W

Luminous flux :
180 lm

CRI :
Ra>90

CCT :
3000K/4000K/6000K

Material :
Aluminium

Beam Angle :
15°/24°/36°

Input voltage :
DC24V



Description :
Hanging Shell

Colour :

● BK ● AU

○ WH ○ GY

CTR-WPA0518NR-D



Power :
3W

Luminous flux :
180 lm

CRI :
Ra>90

CCT :
3000K/4000K/6000K

Material :
Aluminium

Beam Angle :
15°/24°/36°

Input voltage :
DC24V



Description :
Hanging Cylinder

Colour :

● BK ● AU

○ WH ○ GY

CTR-WPB6560NR



Power :
5W

Luminous flux :
450 lm

CRI :
Ra>90

CCT :
3000K/4000K/6000K

Material :
Aluminium

Beam Angle :
40°

Input voltage :
DC24V


Description :
Hanging Pendant

Colour :

● BK ● AU

○ WH ○ GY

CTR-WPB6208NR



Power :
3W

Luminous flux :
180 lm

CRI :
Ra>90

CCT :
3000K/4000K/6000K

Material :
Aluminium

Beam Angle :
15°/24°/36°

Input voltage :
DC24V



Description :
Hanging Bell

Colour :

● BK ● AU

○ WH ○ GY

CTR-WPB7080NR



Power :
5W

Luminous flux :
450 lm

CRI :
Ra>90

CCT :
3000K/4000K/6000K

Material :
Aluminium

Beam Angle :
40°

Input voltage :
DC24V

Description :
Hanging Cone

Colour :

● BK ● AU

○ WH ○ GY



**5mm
Magnetic Lighting System**


E x t r e m e l y

s l i m

d e s i g n



CTR-WLB1030NS



Power :
8W

Luminous flux :
700 lm

CRI :
Ra>80

CCT :
3000K/4000K/6000K

Material :
Aluminium


Beam Angle :
100°

Input voltage :
DC24V

Description :
Linear Panel Light

Colour :
BK

CTR-WLB1045NS



Power :
12W

Luminous flux :
1100 lm

CRI :
Ra>80

CCT :
3000K/4000K/6000K

Material :
Aluminium


Beam Angle :
100°

Input voltage :
DC24V

Description :
Linear Panel Light

Colour :
BK

CTR-WLB1060NS



Power :
16W

Luminous flux :
1300 lm

CRI :
Ra>80

CCT :
3000K/4000K/6000K

Material :
Aluminium


Beam Angle :
100°

Input voltage :
DC24V

Description :
Linear Panel Light

Colour :
BK

CTR-WLB1090NS



Power :
24W

Luminous flux :
2300 lm

CRI :
Ra>80

CCT :
3000K/4000K/6000K

Material :
Aluminium

Beam Angle :
100°

Input voltage :
DC24V

Description :
Linear Panel Light

Colour :
BK




E x t r e m e l y

s l i m

d e s i g n

**5mm
Magnetic Lighting System**

CTR-WLA1006NS




Power :
6W
Luminous flux :
500 lm
CRI :
Ra>90
CCT :
3000K/4000K/6000K

Material :
Aluminium
Beam Angle
15°/24°/36°
Input voltage :
DC24V
Description :
Linear Downlight

Colour :
●
BK

CTR-WLA1012NS




Power :
12W
Luminous flux :
1100 lm
CRI :
Ra>90
CCT :
3000K/4000K/6000K

Material :
Aluminium
Beam Angle :
15°/24°/36°
Input voltage :
DC24V
Description :
Linear Downlight

Colour :
●
BK

CTR-WLA1018NS




Power :
18W
Luminous flux :
1600 lm
CRI :
Ra>90
CCT :
3000K/4000K/6000K

Material :
Aluminium
Beam Angle :
15°/24°/36°
Input voltage :
DC24V
Description :
Linear Downlight

Colour :
●
BK

CTR-WLA1024NS




Power :
24W
Luminous flux :
2300 lm
CRI :
Ra>90
CCT :
3000K/4000K/6000K

Material :
Aluminium
Beam Angle :
15°/24°/36°
Input voltage :
DC24V
Description :
Linear Downlight

Colour :
●
BK



CATERLUX
Live an illuminated life



E-mail : info@caterlux.co.in
Website : www.caterlux.co.in